

# NLED492G

LED fittings for surface suspended installation



Mounting Bracket



## APPLICATIONS

- Supermarkets
- Department stores
- Offices

## TECHNICAL DETAILS

- SMD LEDs
- Rated life: 30,000 hours

## CONSTRUCTION



- Steel body
- Polycarbonate diffuser
- Powder coated surface treatment
- Built-in driver
- Supplied complete with mounting bracket and screws for surface installation.

## OPTIONS


- A wire suspension kit (1.5m long) is available to be ordered as a separate item.

### - Wire suspension kit.

Order this as a separate item

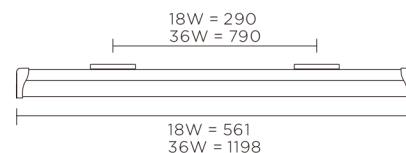

NLED492G06 18W 120°



NLED492G12 36W 120°

Model	Colour temp.	Lumens	CRI	PF
NLED492G06 18W	3000K/4000K/6500K	1,200 lm	>75	>0.9
NLED492G12 36W	3000K/4000K/6500K	2,400 lm	>75	>0.9
Accessories		Model		
Wire suspension kit		NLED492G Suspension wire (1.5m, 2 pcs/set)		