

# NELED4202

Low wattage in-ground light



### APPLICATIONS


- Outdoor decorative lighting
- Paths
- Squares and parks

### TECHNICAL DETAILS

- CREE LEDs
- Rated life: 30,000 hours

### OPTIONS



- **Driver:** Choice of separate DC 24V IP65 driver (separate driver are not included)
- **Connector:** Choice of two types of IP67 connector, straight (type I) or T (type T)



### CONSTRUCTION

- Die-cast aluminium housing
- 316 brushed stainless steel bezel
- Tempered glass cover 5mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- Weight limit: 321kg on area Ø10mm
- Complete with a IP67 cable gland, and pre-wired with 2x1.00mm<sup>2</sup> H05RN wire (DC24V) or 3\*1.00mm<sup>2</sup> H05RN wire (110-240V)

NELED4202/R

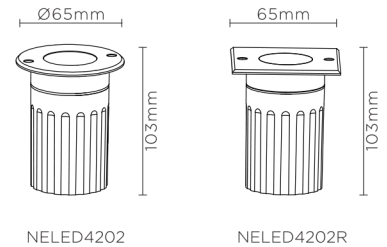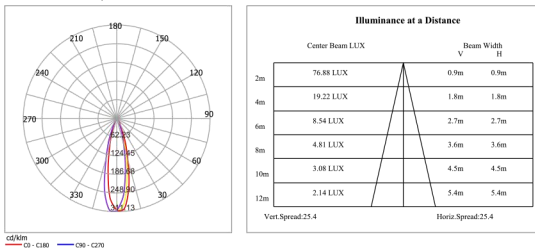

Model	LED Chip	Watts	Colour temp.	Lumens	CRI
NELED4202	1x2W	2.5W	3000K	65 lm	>80
NELED4202	1x2W	2.5W	6000K	77 lm	>80
NELED4202R	1x2W	2.5W	3000K	65 lm	>80
NELED4202R	1x2W	2.5W	6000K	77 lm	>80

Accessories	Driver
CNI02 2pin type I IP67 connector	CNT02 2pin type T IP67 connector
CNI03 3pin type I IP67 connector	CNT03 3pin type T IP67 connector
CNI04 4pin type I IP67 connector	CNT04 4pin type T IP67 connector
CNI05 5pin type I IP67 connector	CNT05 5pin type T IP67 connector
NLED-DV110* (see page 127)	

