





FRANCA 90

UP & DOWN

LED lamp range in modern style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings or on spike. Wall version available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

*Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per installazioni a parete, a soffitto o su picchetto. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con **inclusa lampadina a LED GU10 con Kelvin impostabile**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



3A7.003.U2K

CCT SETTABLE



2700 K

4000 K

SDCM <3



MADE IN ITALY

FRANCA 90 - COMPONENTS

IP55




COVER with no visible screws made of shockproof resin material.

COVER senza viti a vista realizzata in resina antiurto.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

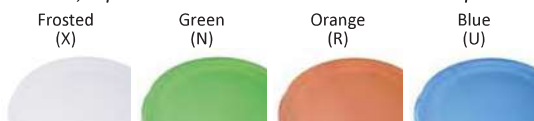

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада GU10.

BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

INSTALLATION ELEMENTS

- BRACKETS for single or double lights versions
- SPIKE for in ground installation.

ELEMENTI DI FISSAGGIO:

- SUPPORTI per installazione a parete con luce singola o doppia
- PICCHETTO per l'installazione nel terreno.

FRANCA 90



Dimensions and weight

Diameter: Ø95 mm
Height: 115 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted Green Orange
Blue

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5 W	366 lm	4000 K	.U1K
			2700 K	
	6 W	615 lm	4000 K	.L1K
			2700 K	

Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and **Kelvin settable GU10 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.



CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCA 90	
3,5W	3A7.000.U1K
6W	3A7.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

FRANCA 90 SPIKE	
3,5W	3A7.001.U1K
6W	3A7.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-1L WALL	
3,5W	3A7.002.U1K
6W	3A7.002.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-2L WALL	
2 x 3,5W	3A7.003.U2K
2 x 6W	3A7.003.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 22
mc 0,12